

Descriptions


The XESD124N-5V0 is a transient voltage suppressor designed to protect sensitive electronic components which are connected to high-speed data lines from over-stress damage caused by Electrostatic Discharging (ESD) and Lighting.

Features


- 1-Line, Bi-directional
- Working voltage: $\pm 5.0\text{V}$ Max.
- ESD withstand voltage according to IEC61000-4-2: $\pm 30\text{kV}$ (contact & air discharge)
- Lighting withstand according to IEC61000-4-5: 5.5A ($8/20\mu\text{s}$)
- Solid-state silicon technology
- Low leakage current
- Device meets MSL 1 requirements
- Pb-Free, Halogen Free, RoHS Compliant

Applications

- Notebooks and smartphone
- Computer and peripheral devices
- Portable Electronics



DFN1006-2L



Circuit diagram




M = Device code
* = Date code(A~z)

Marking

Part Number	Package Type	Marking Code	Shipping
XESD124N-5V0	DFN1006-2L	M*	10000/Tape & Reel

Electrical Characteristics

Symbol	Parameter
V_{BR}	Reverse Breakdown Voltage
I_{BR}	Reverse Breakdown Current
V_{RWM}	Reverse Stand-off Voltage
I_R	Reverse Leakage Current
V_H	Holding Voltage
I_H	Holding Current
V_T	Trigger Voltage
I_T	Trigger Current
I_{PP}	Peak Pulse Current
V_{CL}	Clamping Voltage

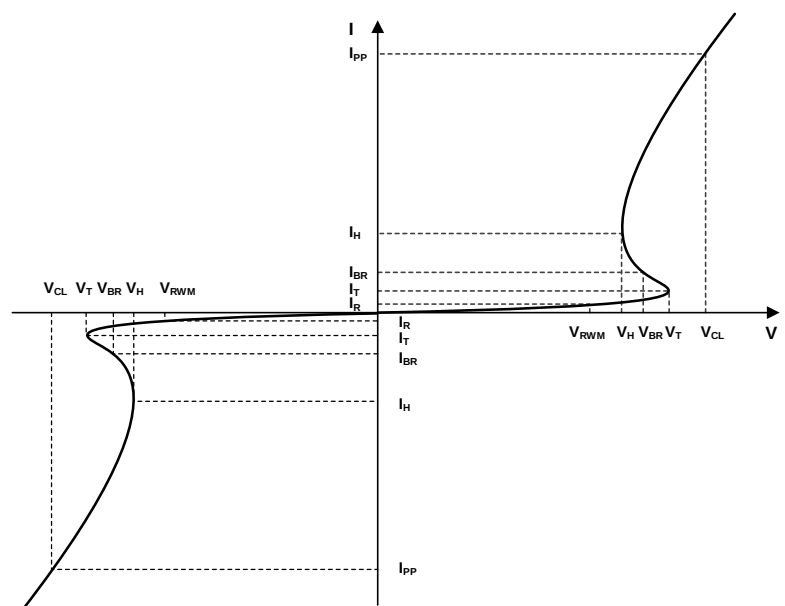

Absolute Maximum Ratings ($T_A = 25^{\circ}\text{C}$, unless otherwise specified)






Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	P_{PP}	55	W
Peak Pulse Current ($t_p=8/20\mu\text{s}$)	I_{PP}	5.5	A
ESD air discharge voltage according to IEC61000-4-2	V_{ESD}	± 30	kV
ESD contact discharge voltage according to IEC61000-4-2		± 30	
Junction Temperature Range	T_J	-55~125	$^{\circ}\text{C}$
Operating Temperature Range	T_{OP}	-55~125	$^{\circ}\text{C}$
Lead Solder Temperature (10 Seconds)	T_L	260	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55~150	$^{\circ}\text{C}$


Electrical Characteristics ($T_A = 25^{\circ}\text{C}$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V_{RWM}				± 5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	5.8		9.5	V
Reverse Leakage Current	I_R	$V_{RWM} = 5.0\text{V}$			200	nA
Holding Voltage	V_H	$I_H = 80\text{mA}$	5.2			V
Clamping Voltage ¹⁾	V_{CL}	$I_{PP} = 16\text{A}$, $t_p = 100\text{ns}$		9		V
Dynamic Resistance ¹⁾	R_{DYN}			0.22		Ω
Clamping Voltage ²⁾	V_{CL}	$V_{ESD} = \pm 8\text{kV}$		9		V
Clamping Voltage ³⁾	V_{CL}	$I_{PP} = 1\text{A}$, $t_p = 8/20\mu\text{s}$		5.8	7.5	V
		$I_{PP} = 5.5\text{A}$, $t_p = 8/20\mu\text{s}$		8	10	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$		0.3	0.4	pF


Notes:

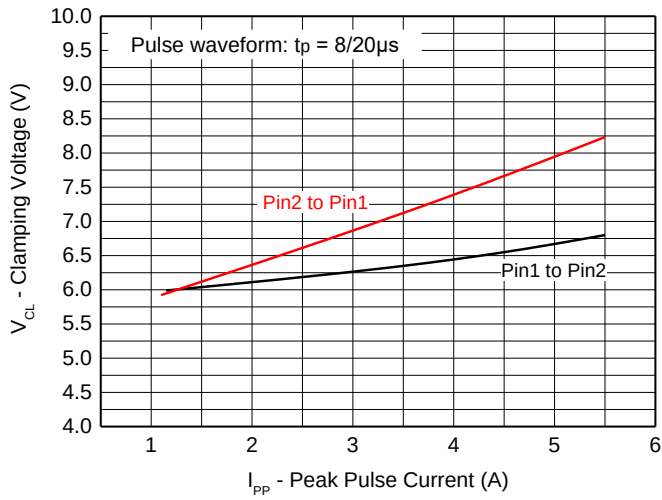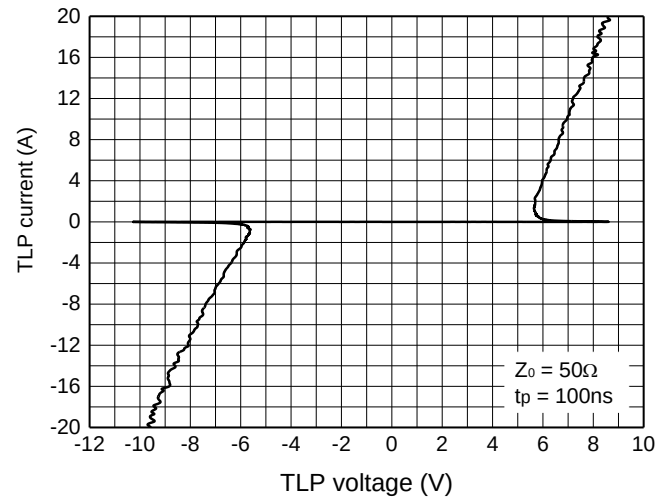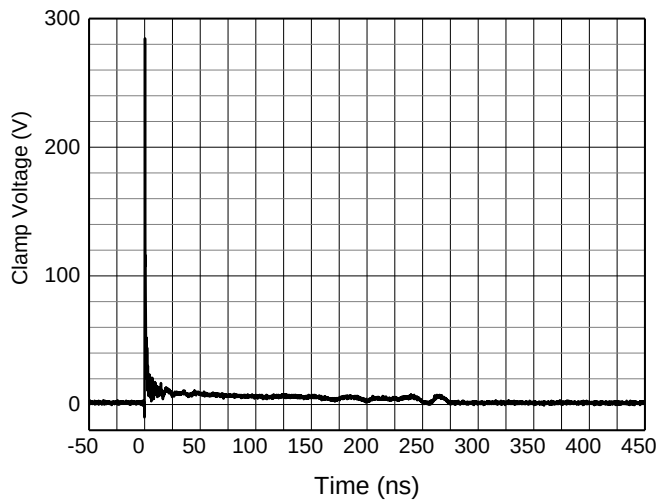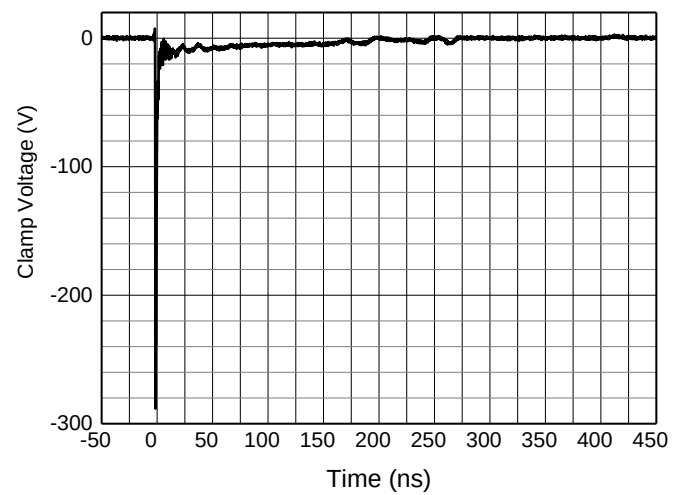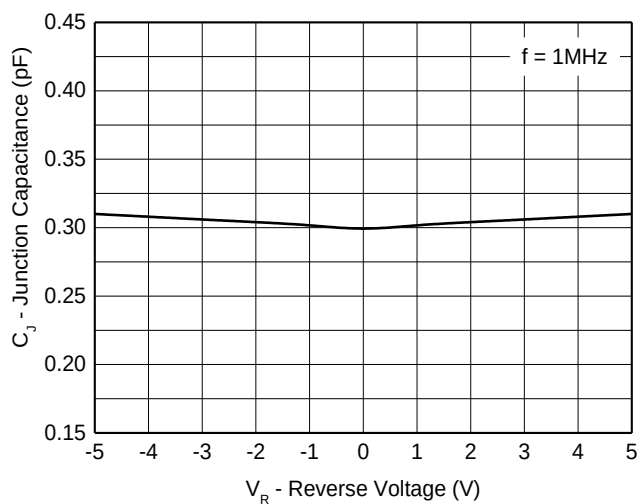- 1) Clamping Voltage was measured by Transmission Line Pulse Test (TLP), TLP conditions: $Z_0 = 50\ \Omega$, $t_r = 0.6\text{ns}$, $t_p = 100\text{ns}$, I_{TLP} and V_{TLP} averaging window from 70ns to 90ns. R_{DYN} is calculated from 4A to 16A.
- 2) Contact discharge mode, according to IEC61000-4-2.
- 3) Clamping Voltage was measured by 8/20 μs current waveform, $R_s = 2\ \Omega$, according to IEC61000-4-5.


Typical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Clamping Voltage vs. Peak Pulse Current

TLP IV Curve

+8kV contact discharge per IEC61000-4-2

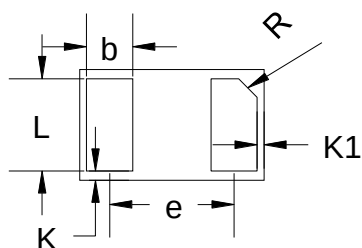-8kV contact discharge per IEC61000-4-2

Capacitance vs. Reverse Voltage

PACKAGE OUTLINE & PCB LAYOUT DIMENSIONS


TOP VIEW




SIDE VIEW



BOTTOM VIEW

Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.45	0.50	0.55
D	0.55	0.60	0.65
E	0.95	1.00	1.05
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.675BSC		
R	0.07	0.10	0.13
K	0.025	-	0.065
K1	0.025	-	0.065

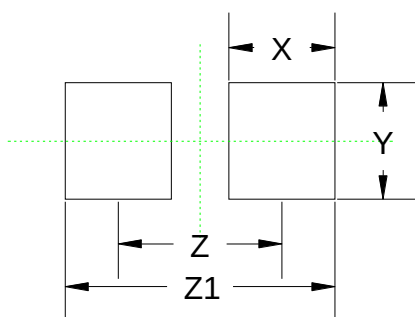


Land Layout

Symbol	Dimensions in Millimeters
X	0.55
Y	0.60
Z	0.85
Z1	1.40


Notes: This Land Layout is for reference purposes only. Please consult your manufacturing partners to ensure your company's PCB design guidelines are met.

TAPE AND REEL INFORMATION

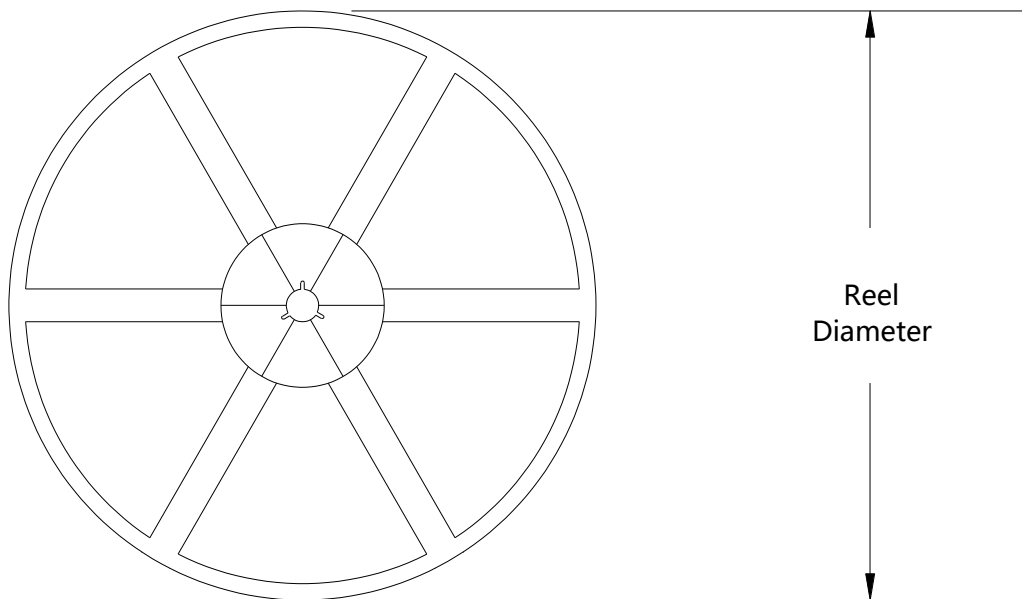Reel Dimensions



Tape Dimensions

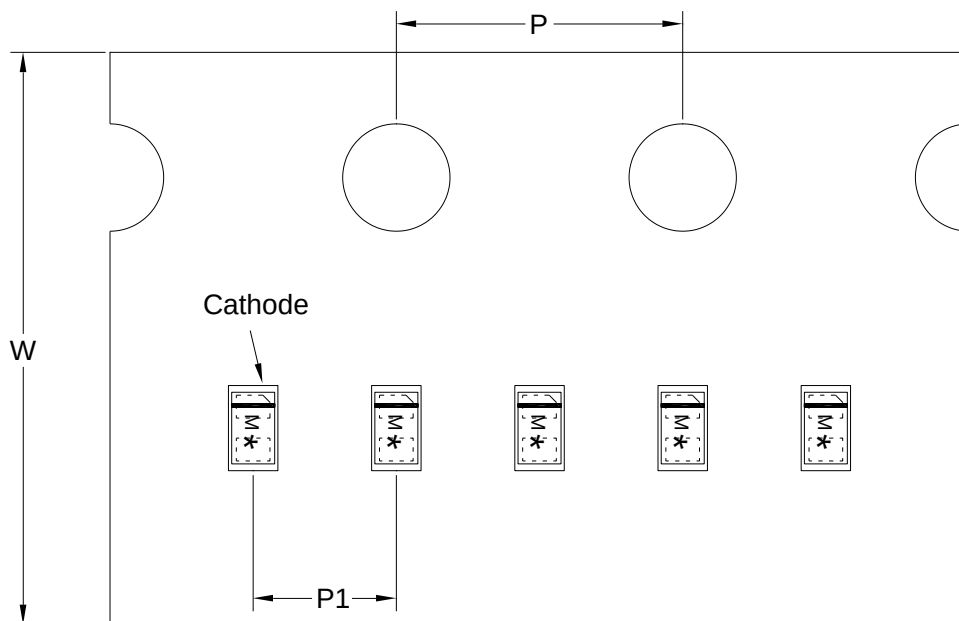

User Direction of Feed

Package Type	Reel Diameter(inch)	W (mm)	P (mm)	P1 (mm)
DFN1006-2L	7	8	4	2