

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

对外接口

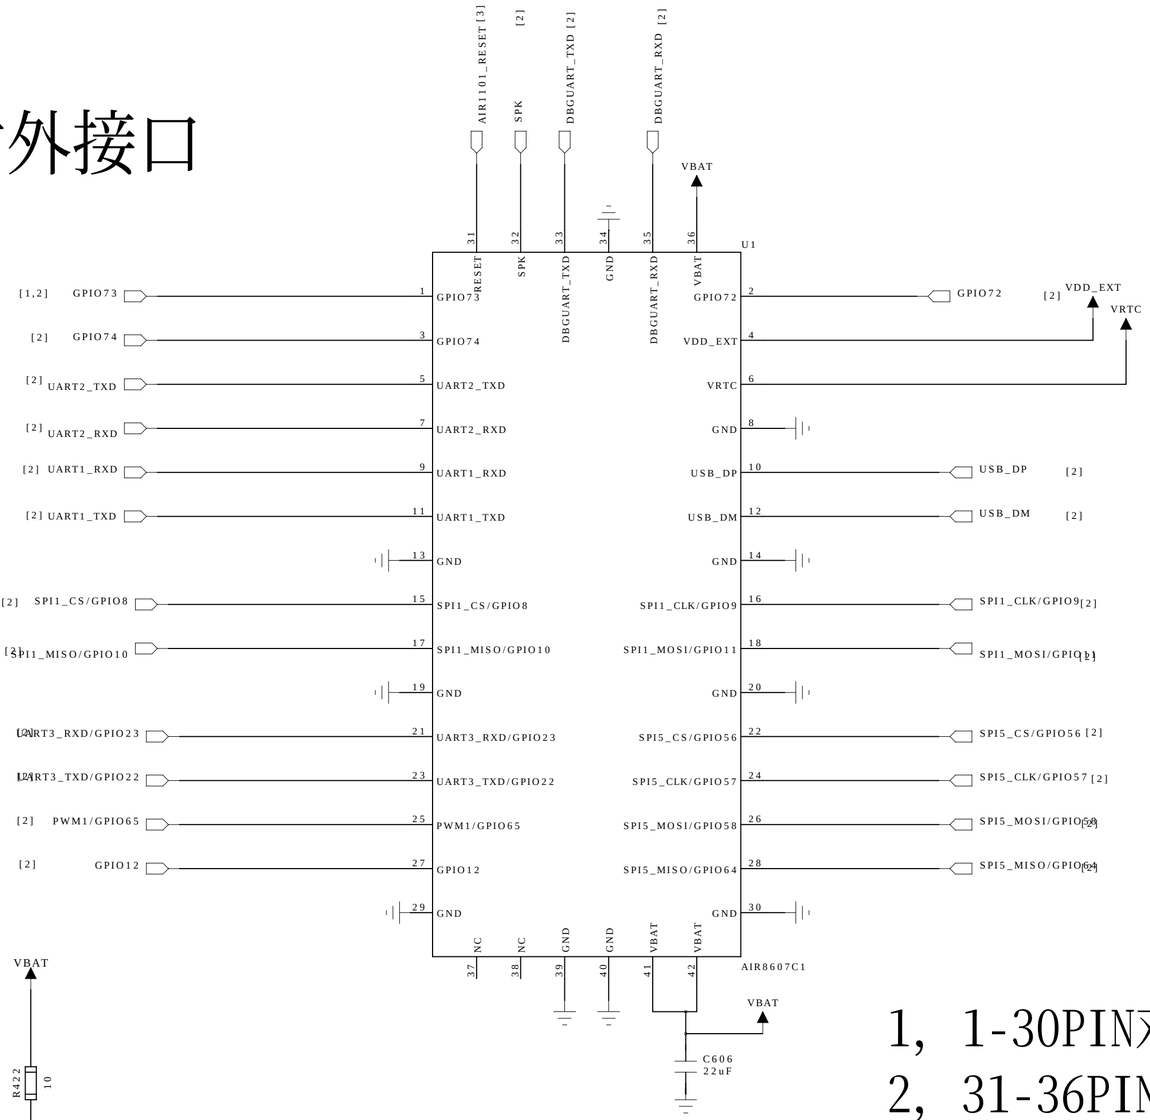

蜂鸣器

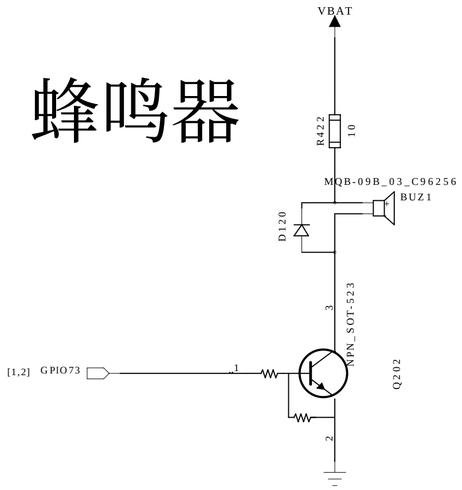



1, 1-30PIN对应位号J100 2*15=30PIN插针
2, 31-36PIN对应位号J102 2*3=6PIN插针
3, 37-42PIN对应位号J101 2*3=6PIN插针


DRAWN: chengong	DATED: 20261010	COMPANY: 上海合宙				
		TITLE: Air8607C				
CHECKED: Laolu	DATED: 20260928	CODE: <Code>	SIZE: A2	DRAWING NO:	REV:	
QUALITY CONTROL: Laolu	DATED: 20260928					
RELEASED: Laolu	DATED: 20260928	SCALE: <Scale>		SHEET: 1 OF 4		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

Air1101

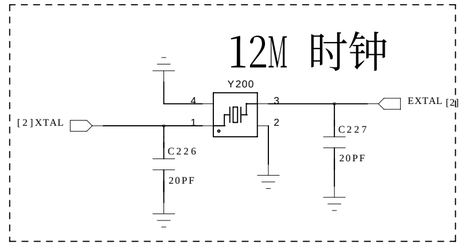

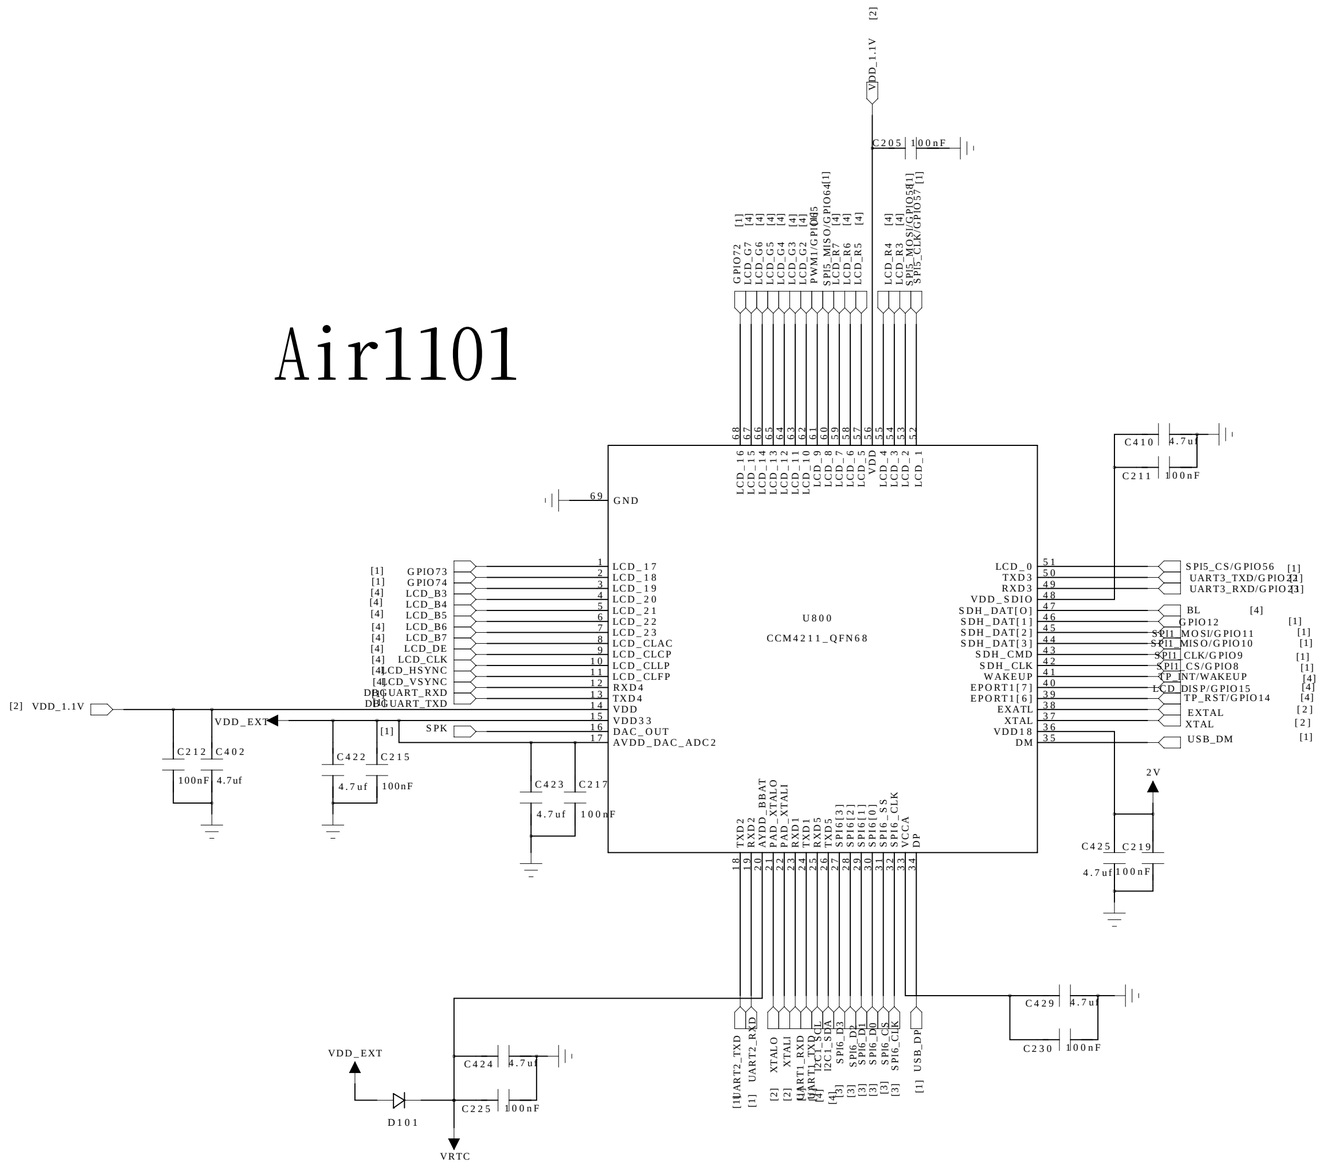





COMPANY: 上海合宙			
TITLE: Air8607C			
DRAWN: chengong	DATED: 20261010		
CHECKED: Laolu	DATED: 20260928	CODE: <Code>	SIZE: A2
QUALITY CONTROL: Laolu	DATED: 20260928	DRAWING NO:	REV:
RELEASED: Laolu	DATED: 20260928	SCALE: <Scale>	SHEET: 2 OF 4

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


系统主电源 3.3V

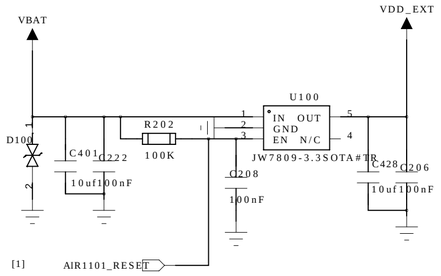

PSRAM电源 2.0V

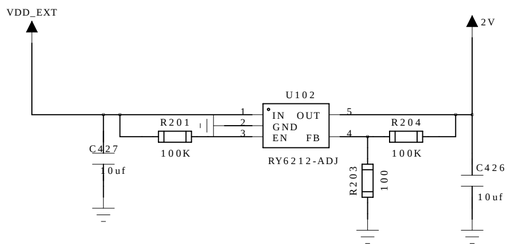


SPI Nor Flash

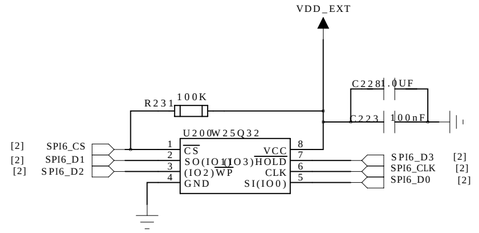


DRAWN: chengong	DATED: 20261010	COMPANY: 上海合宙			
		TITLE: Air8607C			
CHECKED: Laolu	DATED: 20260928	CODE: <Code>	SIZE: A2	DRAWING NO:	REV:
QUALITY CONTROL: Laolu	DATED: 20260928				
RELEASED: Laolu	DATED: 20260928	SCALE: <Scale>		SHEET: 3 OF 4	

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

数字电源3.3V

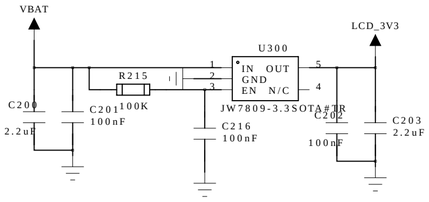


背光控制

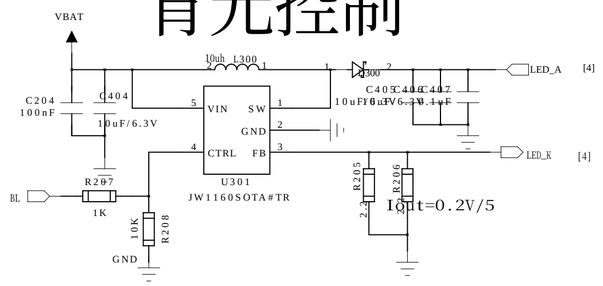


偏置电源

本示例仅在50PIN LCD类型时使用,7寸 9寸 10.1寸等大尺寸LCD常用


VGH:18.5V
VGL:--8.2v
AVDD:9.6V
VCOM:4.2V

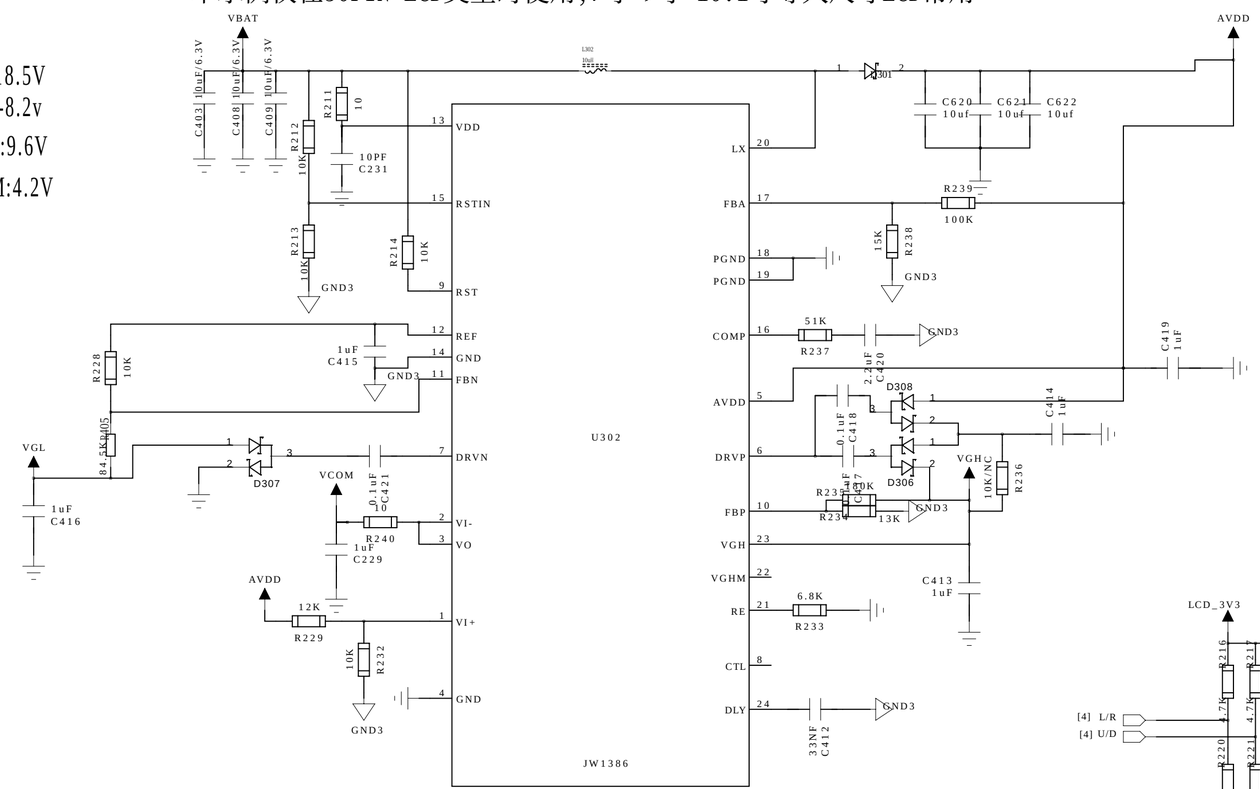

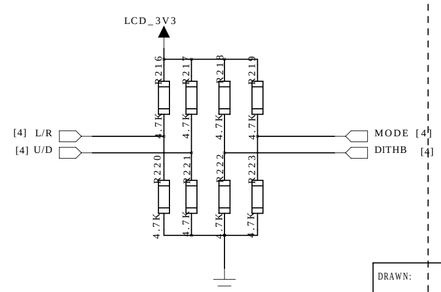


50PIN LCD

常用于7寸 9寸 10.1寸等大尺寸LCD

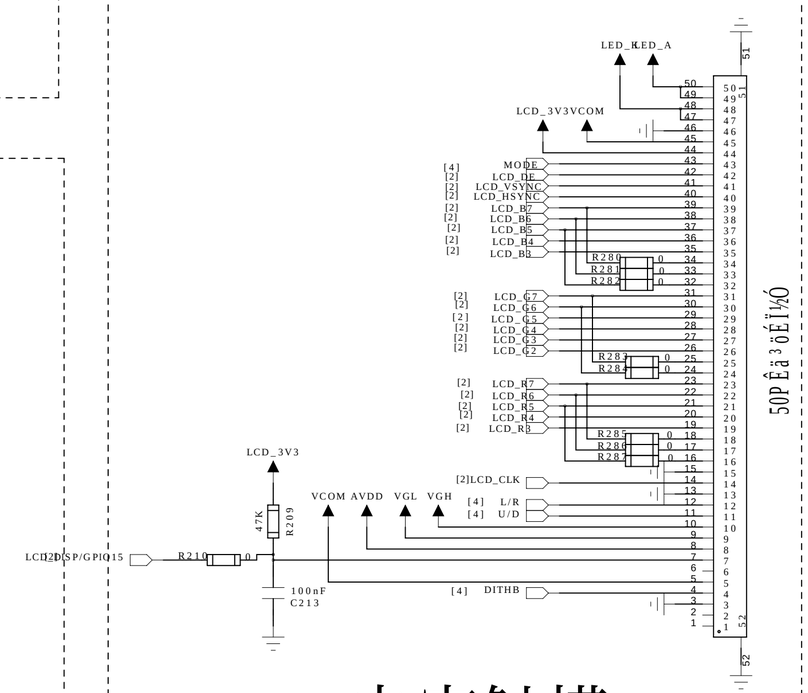

电容触摸

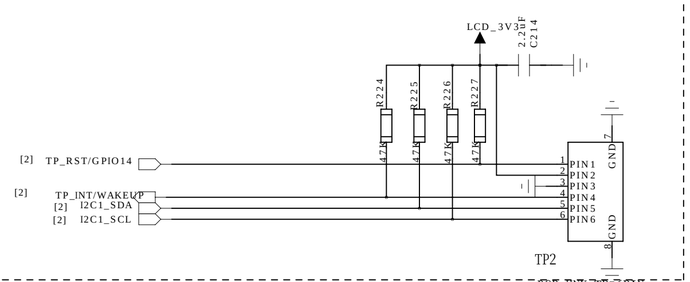

DRAWN: chengong	DATED: 20261010	COMPANY: 上海合宙	
CHECKED: Laolu	DATED: 20260928	TITLE: Air8607C	
QUALITY CONTROL: Laolu	DATED: 20260928	CODE: <Code>	SIZE: A2
RELEASED: Laolu	DATED: 20260928	DRAWING NO:	REV:
		SCALE: <Scale>	SHEET: 4 OF 4